

Rec'd PCT/PTO 19 OCT 2004

PCT/IB 03/01101

20.03.03



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

REC'D 09 APR 2003

WIPO

PCT

10/511805

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02076558.2

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk

Best Available Copy

Anmeldung Nr.:  
Application no.: 02076558.2  
Demande no.:

Anmeldetag:  
Date of filing: 22.04.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Broenewoudseweg 1  
5621 BA Eindhoven  
NEDERLANDS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
(If no title is shown please refer to the description.  
(Si aucun titre n'est indiqué se référer à la description.)

Electro-optical display device

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
angehendige(n)  
Anspruch/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

02F1/167

Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE TR

22.04.2002

96

The invention relates to an electro-optical display device comprising a translucent front wall and at least one pixel with an electro-optical medium, a scattering medium and a switching electrode associated with the front wall, and drive means via which the pixel can be brought to different optical states.

5           An example of an electro-optical display device is an electrophoretic display device. Electro-phoretic display devices are based on the motion of charged, usually colored particles under the influence of an electric field between two extreme states having a different transmissivity or reflectivity. With these display devices, dark (colored) characters can be imaged on a light (colored) background, and vice versa. Electro-phoretic display devices are  
10 notably used in display devices taking over the function of paper are often referred to as "electronic paper" or "paper white" applications (electronic newspapers, electronic diaries).

          Use in the claims or description of this invention of the wording "switching electrode" does not exclude that the electrode is, if desired, divided into a plurality of sub-electrodes which are supplied with one and the same voltage either externally or via  
15 switching elements.

          In known electro-phoretic display devices, the electro-phoretic medium is provided between two switching electrodes, one of which is associated with the front wall  
20 while the other, normally, is associated with the rear wall. In operation, said switching electrodes are supplied with drive voltages, thereby bringing the pixel to two (extreme) optical states. One of the switching electrodes is realized, for example, as two mutually interconnected narrow conducting strips on the front wall of a pixel or display element. At a positive voltage across this switching electrode with respect to a bottom electrode covering  
25 the entire bottom surface of the display element, charged particles (for example, negatively charged) move to the potential plane which is defined by the two interconnected narrow conducting strips. The (negatively) charged particles spread across the front face of the pixel which assumes the color of the charged particles. At a negative voltage across the switching

electrode with respect to the bottom electrode, the (negatively) charged particles spread across the rear wall of the pixel, the pixel assuming the color of the liquid.

Electro-phoretic display devices provide a viewing angle which is practically as wide as that of normal paper. This wide viewing angle is achieved by obtaining contrast  
 5 by looking either at scattering (white) or absorbing (black) particles or at dark absorbing liquids (ink) with white scattering particles. In all cases, the incident light (either directional or diffuse) will be scattered in all directions by the particles. Whilst this results in an excellent viewing angle, a drawback is that this also results in a loss in brightness.

10

It is an object of the invention to eliminate the above disadvantage wholly or partly. According to the invention, an electro-optical display device of the kind mentioned in the opening paragraph is for this purpose characterized in that the pixel comprises a low-refractive index material with a refractive index  $n_{li}$  in the range from  $1.0 \leq n_{li} \leq 1.6$ .

15

By introducing a low-refractive index material more light can be coupled out of the pixel, thereby increasing the brightness of the electro-optical display device. The invention is based on the recognition that light scattered at an angle higher than the limit angle for total internal reflection can not be coupled out of the pixel. By introducing a low-refractive index material the limit angle is increased enabling more light to be issued from the  
 20 pixel.

20

Light which is incident on the pixel is redistributed by diffuse scattering in the known electro-optical display device can not escape from the front wall if the angle with the normal on the surface of the front wall exceeds the limit angle,  $\theta_{la}$ . If the incoming light flux has a light flux  $I_{in}$ , and the light that is reflected has a light flux  $I_{out}$ , the relation between the  
 25 incident light and the light that is coupled out of the pixel is, in first order approximation, given by:

25

$$I_{out} \leq \frac{I_{in} (1 - \cos(2\theta_{la}))}{2}$$

30 In the above formula, reflection in the pixel is assumed to be Lambertian. The  $\leq$ -sign in the equation has been introduced to indicate that additional Fresnel losses have been neglected. In Table I the reflected flux  $I_{out}$  under normal conditions has been calculated for various values of the refractive index of the front wall.

Table I Reflected flux for various values of the refractive index of the front wall.

Refractive index n of front wall	Limit angle $\theta_{la}$	Reflected flux $I_{out}$
1.0	90.0°	1.00 $I_{in}$
1.1	65.4°	0.83 $I_{in}$
1.2	56.4°	0.69 $I_{in}$
1.3	50.3°	0.59 $I_{in}$
1.4	45.6°	0.51 $I_{in}$
1.5	41.8°	0.44 $I_{in}$
1.6	38.7°	0.39 $I_{in}$

For a front wall made of glass or Poly(EthyleneTerephthalate) (PET)  $n \approx 1.5$  and only  
 5  $0.44 \times I_{in}$  of the incident light is reflected. For a front wall made of PolyCarbonate  $n \approx 1.6$   
 only  $0.39 \times I_{in}$  of the incident light is reflected.

By introducing a low-refractive index material more light can be coupled out  
 of the pixel. Preferably, the refractive index of the low-refractive index material is  $n_{li} \leq 1.4$ .

A preferred embodiment of the electro-optical display device according to the  
 10 invention is characterized in that the low-refractive index material is selected from the group  
 formed by a fluor-polymer, a low-dielectric inorganic film and a low-dielectric nano-porous  
 film. For fluor-polymers the refractive index is approximately 1.3. According to Table I the  
 reflected flux for  $n \approx 1.3$  increases to  $0.59 \times I_{in}$ , a gain of a factor of  $0.59/0.44 = 1.34$  with  
 respect to the known electro-optical display devices. Low-dielectric films are for instance  
 15 found in fluorides such as LiF, which has  $n \approx 1.39$  or  $MgF_2$  which has  $n \approx 1.38$ . Also  
 fluosilicates are known to have a low index of refraction, e.g.  $MgSiF_6$  has  $n \approx 1.35$  and  
 $K_2SiF_6$  has  $n \approx 1.34$ . The refractive index of nano-porous films or aero-gels can be as low as  
 1.05 – 1.1. For  $n \approx 1.1$  the gain in reflected flux is approximately 2.

A preferred embodiment of the electro-optical display device according to the  
 20 invention is characterized in that, the electro-optical medium is an electro-phoretic medium.  
 In an alternatively preferred embodiment of the electro-optical display device according to  
 the invention, the electro-optical medium is an electro-chromic medium.

In a first embodiment of the electro-optical display device according to the  
 invention, the low-refractive index material is provided between the electro-optical medium

and the switching electrode associated with the front wall. By introducing a low refractive index layer directly above the scattering medium, light scattered at higher angles is first diffracted towards the normal on entering the front wall, and emerges more efficiently from the front wall. More scattered light will be emitted by the pixel and the electro-optical display device will appear brighter.

In a alternative embodiment of the electro-optical display device according to the invention, the low-refractive index material is provided between the translucent front wall and the switching electrode associated with the front wall. In this embodiment, the switching electrode is directly in contact with the electro-optical medium. This has the advantage that

the voltage is applied directly to the electro-optical system and does not drop across the layer of the low-refractive index medium. In this embodiment the drive voltages are reduced. In addition, a substantial reduction of the image retention is achieved in the electro-optical display devices. This embodiment is particularly effective when the thickness of the switching electrode is less than or equal to the wavelength of the light (otherwise this will refract the scattered light and result in TIR). Normally, the thickness of the (ITO) switching electrodes in electro-optical display devices is much less than the wavelength of visible light.

In embodiments where the electro-phoretic medium in which the particles are immersed is a low-index material, the brightness enhancement will always be present and the brightness of the electro-optical display device increases substantially. The enhancement of the brightness is largest if the particles are situated close to the low-refractive index layer. In a further preferred embodiment, the particles produce scattering (scattering medium) close to the surface (i.e. small sized and highly scattering particles). The scattering works best when the pixel is at its maximum brightness (i.e. when all the white particles are close to the front wall): pixels at intermediate grey levels (where the white particles may be further from the surface) show less brightness enhancement.

In a third embodiment of the electro-optical display device according to the invention, the electro-optical medium comprises particles, the particles being provided in the low-refractive index material. By introducing the particles directly into a low refractive index liquid, light scattered at higher angles is diffracted towards the normal before entering the front wall, and emerges more efficiently from the front wall. More scattered light will be emitted by the pixel and the electro-optical display device will appear brighter.

Preferably, the distance between the low-refractive index material and the electro-optical medium is less than or equal to the wavelength of visible light. In an alternatively preferred embodiment of the electro-optical display device, the distance

between the low-refractive index material and the electro-optical medium is less than or equal to 500 nm. In both embodiments, total internal reflection (TIR) can be effectively reduced.

These and other aspects of the invention are apparent from and will be elucidated with reference to the embodiments described hereinafter.

In the drawings:

Figure 1 shows an electro-optical display device,

Figure 2 shows a pixel of an electro-optical display device according to an embodiment of the invention in cross-section, and

Figure 3 shows a pixel of an electro-optical display device according to an alternative embodiment of the invention in cross-section.

The Figures are purely diagrammatic and not drawn to scale. Particularly for clarity, some dimensions are exaggerated strongly. Similar components in the Figures are denoted by the same reference numerals as much as possible.

Figure 1 shows very schematically an electric equivalent of a part of a electro-optical display device 1 to which the invention is applicable. It comprises a matrix of pixels 10 at the area of crossings of row or selection electrodes 7 and column or data electrodes 6. The row electrodes numbered from 1 to m in Figure 1 are consecutively selected by means of a row driver 4, while the column electrodes numbered from 1 to n in Figure 1 are provided with data via a data register 5. To this end, incoming data 2 are first processed, if necessary, in a processor 3. Mutual synchronization between the row driver 4 and the data register 5 takes place via drive lines 8 connected to the processor 3.

Drive signals from the row driver 4 and the data register 5 select a pixel 10 (referred to as passive drive). Normally, a column electrode 6 acquires such a voltage with respect to a row electrode 7 that the pixel assumes one of two extreme states at the area of the crossing (for example, black or colored, dependent on the colors of the liquid and the electro-optical particles).

If desired, drive signals from the row driver 4 may select the picture electrodes via thin-film transistors (TFTs) 9 whose gate electrodes are electrically connected to the row electrodes 7 and whose source electrodes are electrically connected to the column electrodes

6 (referred to as active drive). The signal at the column electrode 6 is transferred via the T to a picture electrode, coupled to the drain electrode, of a pixel 10. The other picture electrodes of the pixel 10 are connected to, for example, ground, for example, by means of one (or more) common counter electrode(s). In the example of Figure 1, such a TFT 9 is shown diagrammatically for only one pixel 10.

Preferably, the electro-optical medium is an electro-phoretic medium. Preferably, the electro-optical medium and the scattering medium are combined in the electro-phoretic medium. In an alternatively preferred embodiment of the electro-optical display device according to the invention, the electro-optical medium is an electro-chromic medium. In a further preferred embodiment of the electro-optical display device according to the invention, the switching electrode and the electro-chromic medium are combined.

Figure 2 shows schematically a pixel 10 of an electro-optical display device according to an embodiment of the invention in cross-section. The pixel 10 comprises a translucent front wall 12 made, for example, of glass or of a synthetic material. A switching electrode 6, preferably made of indium tin oxide (ITO), is associated with the front wall 12, in the example of Figure 2, the switching electrode 6 is provided on the front wall 12. In addition, the pixel 10 comprises a rear wall 11 provided with at least one further switching electrode 7. In the example of Figure 2, the pixel 10 is filled with an electro-phoretic medium, for example, a dark suspension or liquid 13 containing, in this example positively charged, white particles 14. The switching electrodes 6, 7 are connected to the drive means (not shown in Figure 2) in order to realize the different optical states of the pixel 10. Depending on the voltage between the switching electrodes 6, 7, the white particles 14 move, for example, towards the switching electrode 6 associated with the front wall 12 of the pixel 10. Viewed from the viewing direction 15, the pixel 10 now has the color of the liquid 13 (which is dark or black in this case). Changing the voltage between the switching electrodes 6, 7, the white particles 14 move, for example, towards the further switching electrode 7 associated with the rear wall 12 of the pixel 10. Viewed from the viewing direction 15, the pixel 10 now has the color of the particle 14 (which is white in this case). The latter situation is exemplified in Figure 2.

According to the measure of the invention, the pixel 10 comprises a low-refractive index material with a refractive index  $n_{li}$  in the range from  $1.0 \leq n_{li} \leq 1.6$ . In the example of Figure 2, a layer of a low-refractive index material 21 is provided between the electro-optical medium and the switching electrode 6 associated with the translucent front wall 12. In an alternative embodiment, the low-refractive index material is provided between



the translucent front wall and the switching electrode associated with the translucent front wall. Preferably, the thickness of the switching electrode is less than or equal to the wavelength of the light.

By adding one or more layers of a material with low refractive index between the electro-optical medium and the front wall of the electro-optical display, the brightness of the electro-optical display device is improved. The closer the refractive index of the low-index medium matches that of air, the more brightness improvement is realised. Preferably, the refractive index of the layer of low-refractive index material 21 is  $n_{li} \leq 1.4$ . Materials in the desired range of refractive indices are available. Preferably, the low-refractive index material is selected from the group formed by a fluor-polymer, a low-dielectric inorganic film and a low-dielectric nano-porous film. For fluor-polymers the refractive index is approximately 1.3 whereas the refractive index of nano-porous films or aero-gels is approximately 1.1. Low-dielectric films are for instance found in fluorides such as LiF, which has  $n \approx 1.39$  or  $MgF_2$  which has  $n \approx 1.38$ . In addition, fluosilicates are known to have a low index of refraction, e.g.  $MgSiF_6$  has  $n \approx 1.35$  and  $K_2SiF_6$  has  $n \approx 1.34$ . The refractive index of nano-porous films or aero-gels can be as low as 1.05 – 1.1.

Figure 2 shows a number of light rays (the arrows indicate the travelling direction). An incoming light ray 25 enters the front wall 12 from the air side of the pixel 10 and after passing the front wall 12 and the low-refractive index material 21, the light is diffusively scattered on one of the particles 14 (scattering medium) in the electro-phoretic liquid 13. By introducing (the layer of) the low refractive index material layer directly above the scattering particles 14 (scattering medium), light scattered at higher angles by the particles 14 is first diffracted towards the normal on entering the front wall 12 of the pixel. Substantially more light rays 26, 26', ... eventually emerge from the front wall 12, thereby enhancing the brightness of the pixel of the electro-optical display device. According to the measure of the invention an electro-optical display device is realized with a wide viewing angle and a high brightness.

To realize the highest gain in brightness, the distance between the low-refractive index material 21 and the electro-optical medium should preferably be less than or equal to the wavelength of visible light. Visible light encompasses the wavelength range in the electromagnetic spectrum from approximately 400 to 780 nm. Alternatively, the distance between the low-refractive index material (21) and the electro-optical medium is less than or equal to 500 nm.

Figure 3 shows schematically a pixel 10 of an electro-optical display device according to an alternative embodiment of the invention in cross-section. Similar

components have been given the same reference numeral. In the example of Figure 3, the

pixel 10 comprises a translucent front wall 12. A switching electrode 6 is provided on the

front wall 12. In addition, the pixel 10 comprises a rear wall 11 provided with at least one

further switching electrode 7. The pixel 10 is filled with a so-called encapsulated electro-

optical medium 113, 113', ... In this example, each capsule 113, 113', ... comprises a

scattering medium, for example, white particles 14 or black particles 15. The switching

electrodes 6, 7 are connected to the drive means (not shown in Figure 3) in order to realize

the different optical states of the pixel 10. Depending on the voltage between the switching

electrodes 6, 7, the white particles 14 move, for example, away from the switching electrode

6 associated with the front wall 12 while, at the same time, the black particle 15 move

towards the switching electrode 6 associated with the front wall 12 of the pixel 10. Viewed

from the viewing direction 15, the pixel 10 now has a black appearance. Changing the

voltage between the switching electrodes 6, 7, the white particles 14 move, for example,

towards the switching electrode 6 associated with the front wall 12 while, at the same time,

the black particles 15 move away from the switching electrode 6 associated with the front

wall 12 of the pixel 10. Viewed from the viewing direction 15, the pixel 10 now has a white

appearance. The latter situation is exemplified in Figure 3. According to this embodiment of

the invention, the encapsulated electro-phoretic medium 113, 113', ... also comprises the

low-refractive index liquid. Alternatively, the capsule walls are made of a low-refractive

index material. In a further alternative embodiment, the low refractive index material is

provided between the capsules and the switching electrode associated with the front wall of

the pixel.

Figure 3 shows a number of light rays (the arrows indicate the travelling direction). An incoming light ray 25 enters the front wall 12 from the air side of the pixel 10 and after passing the front wall 12, the light is diffusively scattered on one of the particles 14 in the encapsulated electro-phoretic medium. By combining the low refractive index material and the electro-phoretic medium, light scattered at higher angles by the particles 14

(scattering medium) is first diffracted towards the normal before entering the front wall 12 of

the pixel. Substantially more light rays 26, 26', ... eventually emerge from the front wall 12,

thereby enhancing the brightness of the pixel of the electro-phoretic display device.

Accordingly, an electro-optical display device is realized with a wide viewing angle and a high brightness.

It will be apparent that within the scope of the invention many variations are possible for a person skilled in the art.

5 The scope of the invention is not limited to the exemplary embodiments described herein. The invention is embodied in every novel feature and every combination of features. The reference numerals that are mentioned in the claims do not limit the scope thereof. The use of the word "comprise" does not exclude the presence of elements other than those mentioned in the claims. The use of the word "a" or "an" before an element does not exclude the presence of a multitude of such elements.

## CLAIMS:

EPO - DG 1

22.04.2002



1. An electro-optical display device comprising  
a translucent front wall and  
at least one pixel with an electro-optical medium, a scattering medium and a  
switching electrode associated with the front wall, and drive means via which the pixel can  
5 be brought to different optical states,  
characterized in that  
the pixel comprises a low-refractive index material with a refractive index  $n_{li}$   
in the range from  $1.0 \leq n_{li} \leq 1.6$ .
- 10 2. An electro-optical display device as claimed in claim 1, characterized in that  
the refractive index of the low-refractive index material is  $n_{li} \leq 1.4$ .
3. An electro-optical display device as claimed in claim 1 or 2, characterized in  
that the low-refractive index material is selected from the group formed by a fluor-polymer, a  
15 low-dielectric inorganic film and a low-dielectric nano-porous film.
4. An electro-optical display device as claimed in claim 1 or 2, characterized in  
that the low-refractive index material is provided between the switching electrode and the  
electro-optical medium.  
20
5. An electro-optical display device as claimed in claim 1 or 2, characterized in  
that the low-refractive index material is provided between the switching electrode and the  
translucent front wall.
- 25 6. An electro-optical display device as claimed in claim 5, characterized in that  
the thickness of the switching electrode is less than or equal to the wavelength of visible  
light.

7. An electro-optical display device as claimed in claim 1 or 2, characterized in that the electro-optical medium comprises particles in the low-refractive index material.

8. An electro-optical display device as claimed in claim 1 or 2, characterized in that the distance between the low-refractive index material and the electro-optical medium is less than or equal to the wavelength of visible light.

9. An electro-optical display device as claimed in claim 1 or 2, characterized in that the distance between the low-refractive index material and the electro-optical medium is less than or equal to 500 nm.

10. An electro-optical display device as claimed in claim 1 or 2, characterized in that the electro-optical medium is an electro-phoretic medium.

11. An electro-optical display device as claimed in claim 1 or 2, characterized in that the electro-optical medium and the scattering medium are combined as an electro-phoretic medium.

12. An electro-optical display device as claimed in claim 1 or 2, characterized in that the electro-optical medium is an electro-chromic medium.

13. An electro-optical display device as claimed in claim 12, characterized in that the switching electrode and the electro-chromic medium are combined.

ABSTRACT:

EPO - DG 1

22.04.2002



The electro-optical display device has a translucent front wall (12) and at least one pixel (10) with an electro-optical medium, a scattering medium (14) and a switching electrode (6) associated with the front wall (12), and drive means via which the pixel (10) can be brought to different optical states. According to the invention, the pixel (10) comprises a

5 low-refractive index material (21) with a refractive index  $n_{li}$  in the range from  $1.0 \leq n_{li} \leq 1.5$ . Preferably,  $n_{li} \leq 1.4$ . Preferably, the low-refractive index material (21) is provided between the switching electrode (6) and the electro-optical medium. Preferably, the electro-optical medium is an electro-phoretic medium or an electro-chromic medium. The electro-optical display device combines a high brightness with a wide viewing angle.

10

Fig. 2

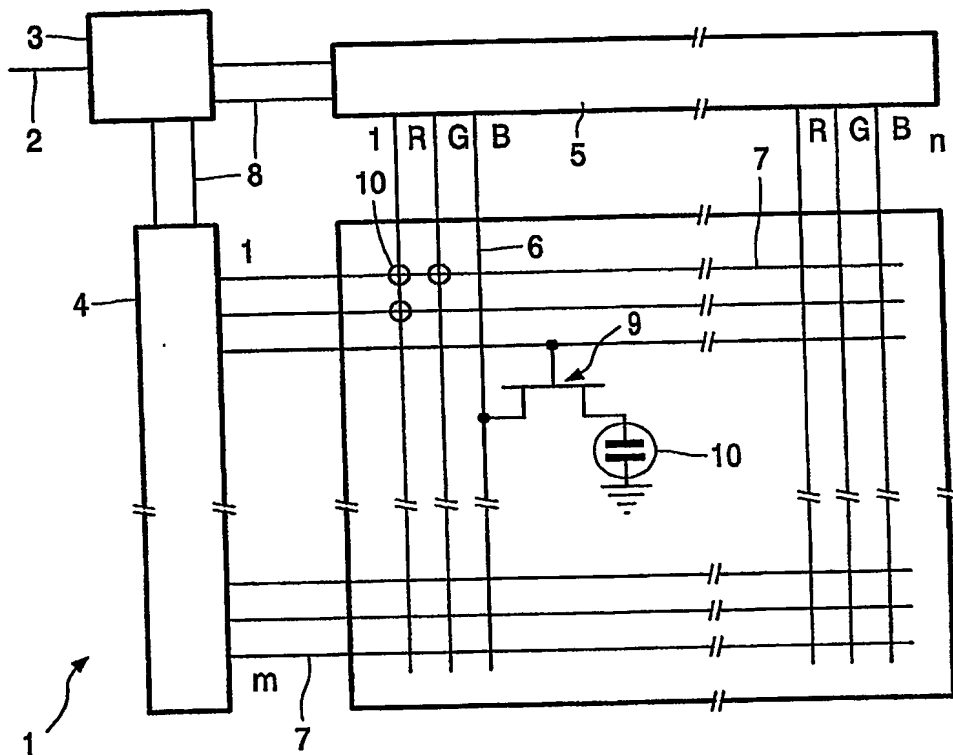


FIG. 1

2/2

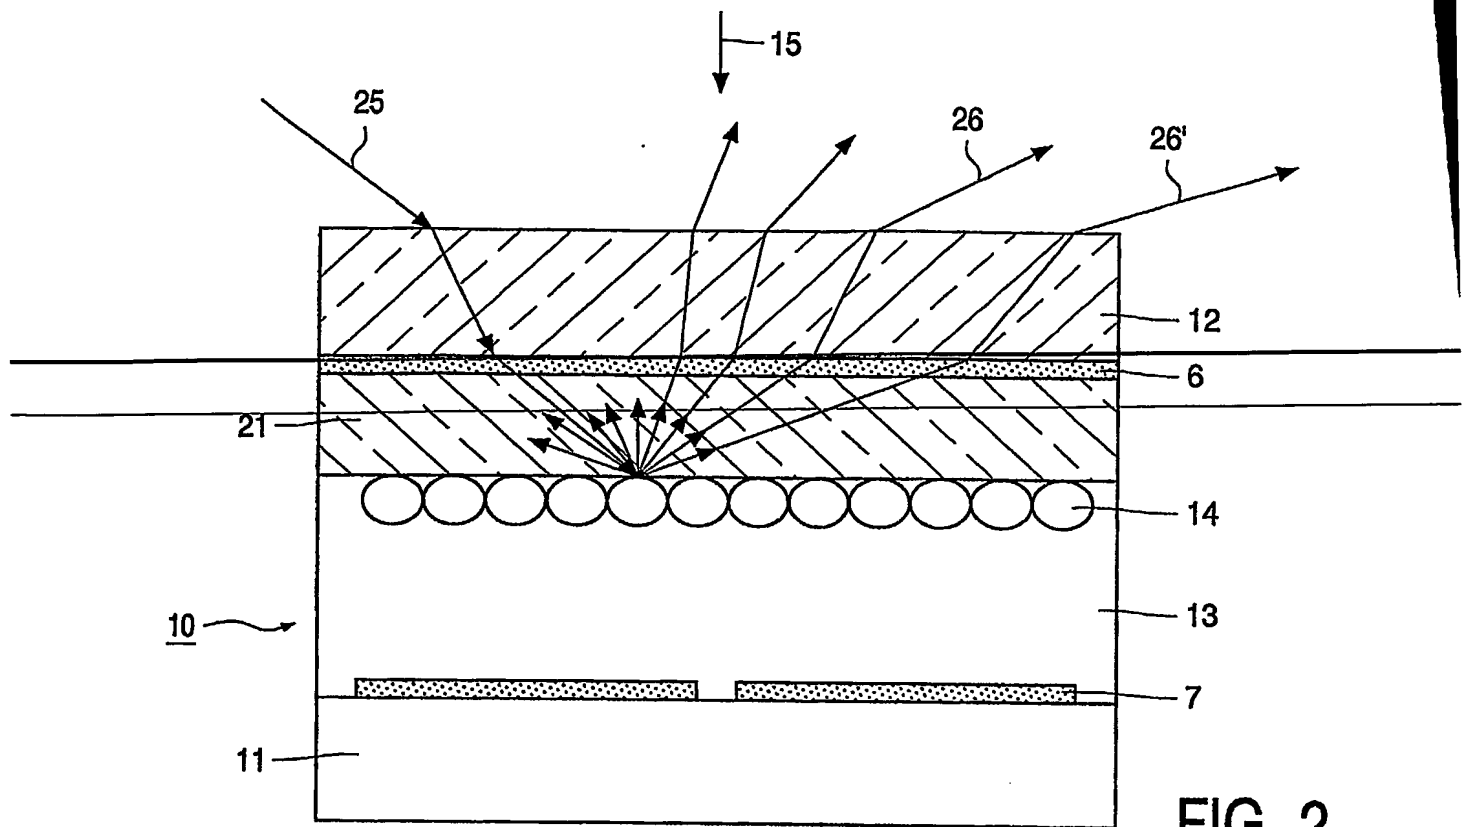


FIG. 2

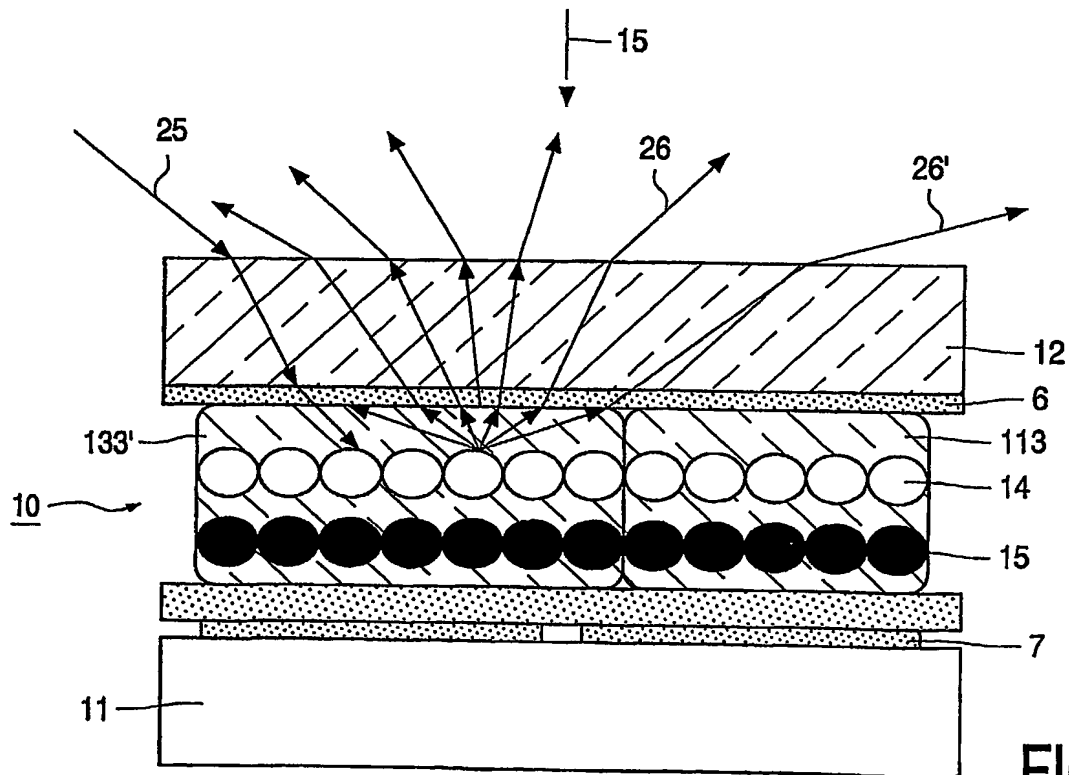


FIG. 3



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**